Forix™ IP20

łączniki, przyciski, gniazda

7824 00

7824 02

7824 20

Pak.	Nr ref.	
		Łączniki 10 AX – 250 V~
		Możliwe podświetlenie z lampką nr ref. 7824 57.
		Łącznik jednobiegunowy
20	7824 00	○ Biały
20	7824 30	● Kremowy
		Łącznik schodowy
20	7824 04	○ Biały
20	7824 34	● Kremowy
		Łącznik świecznikowy
20	7824 02	○ Biały
20	7824 32	● Kremowy
		Łącznik schodowy podwójny
20	7824 06	○ Biały
20	7824 36	● Kremowy
		Przyciski 6 A – 250 V~
		Możliwe podświetlenie lampką nr ref. 7824 57.
		Przycisk jednobiegunowy
20	7824 05	○ Biały
20	7824 35	● Kremowy
		Gniazda wtyczkowe 16 A – 250 V~
		Gniazdo 2P bez przesłony styków
		Zaciski śrubowe.
20	7824 10	○ Biały
20	7824 40	● Kremowy
		Gniazdo 2 x 2P bez przesłony styków
		Montaż poziomy lub pionowy. Zaciski śrubowe.
10	7824 12	○ Biały
10	7824 42	● Kremowy
		Gniazdo 2P+Z SCHUKO z przesłoną styków
		Zaciski śrubowe.
20	7824 20	○ Biały
20	7824 50	● Kremowy

Forix™ IP20

gniazda telefoniczne, RJ45 i TV

7824 17

7824 24

7824 29

Pak.	Nr ref.	
		Gniazda wtyczkowe 16 A – 250 V~ (cd.)
		Gniazdo 2P+Z z przesłoną styków
		Zaciski śrubowe.
20	7824 17	○ Biały
20	7824 47	● Kremowy
		Gniazda 2 x 2P+Z z przesłoną styków
		Zaciski śrubowe.
10	7824 19	○ Biały
10	7824 49	● Kremowy
		Gniazda telefoniczne i RJ45
		Gniazdo 1 x RJ 11
20	7824 14	○ Biały
20	7824 44	● Kremowy
		Gniazdo 1 x RJ 11 + 1 x RJ 45 kat. 5e UTP
20	7824 21	○ Biały
20	7824 51	● Kremowy
		Gniazdo 1 x RJ45 kat. 5e UTP
20	7824 24	○ Biały
20	7824 54	● Kremowy
		Gniazdo 2 x RJ45 kat. 5e UTP
20	7824 28	○ Biały
		Adaptery do gniazd RJ45
		Adapter keystone 2 x RJ 45
20	7824 26	○ Biały
		Gniazda telewizyjne
		Gniazdo TV końcowe do instalacji typu gwiazda 1,5 dB 0 – 2400 MHz
		Gniazdo żeńskie Ø 9,52 mm.
20	7824 15	○ Biały
20	7824 45	● Kremowy
		Wyłącznik nadprądowy 20 A typ C
		1 biegun 230 V~ / 400 V~. Wyłącznik termiczny przeciążeniowy.
10	7824 29	○ Biały

128, av. du Maréchal-de-Lattre-de-Tassigny - 87045 LIMOGES Cedex
Tel : 0 (+33) 5 55 06 87 87 Fax : 0 (+33) 5 55 06 88 88
www.legrand.com

Forix™ - IP 2X
Switches

Cat. No(s).: 7 824 00/02/04/30/32/34



7 824 00/04/30/34



7 824 02/32

1. USE

General lighting control mechanisms become illuminated with lamp (Cat. No. 7 824 57).

2. RANGE

Finishes		Designation
White	Ivory	
7 824 00	7 824 30	One gang switch - 1-way
7 824 02	7 824 32	Two gang switch - 1-way
7 824 04	7 824 34	One gang switch - 2-way

3. OVERALL DIMENSIONS





Cat. No.	A	B	C
7 824 00/30	65	65	34.5
7 824 02/32	65	65	34.5
7 824 04/34	65	65	34.5

3. OVERALL DIMENSIONS *(continued)*

■ **3.1 One-gang base:**

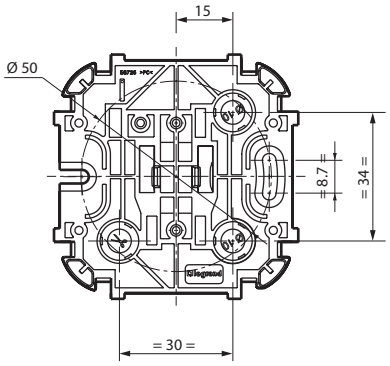

■ **3.2 Two-gang base:**

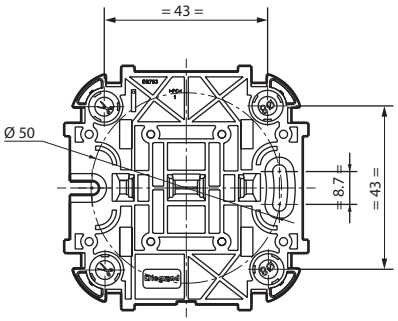

4. CONNECTION

Information for pre-cut:

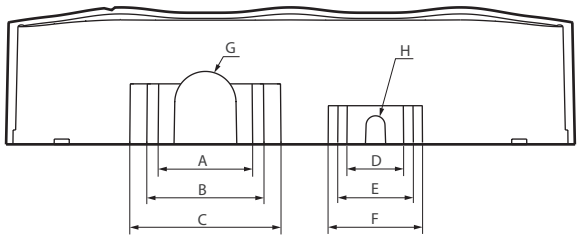

Cat. No.	Pre-cut sides (mm)			
	A **25 x16**	**B** **31 x 16**	**C** **40 x 16**	**D** **15 x 10**
7 824 00/02/04 7 824 30/32/34	-	-	-	2
	E **20 x 10**	**F** **25 x 10**	**G** **Ø 16**	**H** **Ø 5**
	2	2	2	2

Stripping: 10 mm
Terminal type: with screws
Terminal capacity up to: 2 x 2.5 mm^2
Recommended screwdriver size: pozidrive No 2
Recommended tightening torque: 0.5 Nm

5. TECHNICAL CHARACTERISTICS

■ **5.1 Mechanical characteristics**
Protection against liquids: IP 21
Impact tests: IK 04

■ **5.2 Material characteristics**
Base: PC
Cover: PP
Rocker: ABS
Mechanism: PC

■ **5.3 Electrical characteristics**
Voltage: 250 VAC
Current: 10 AX

■ **5.4 Climatic characteristics**
Storage and use temperature: - 25° C to + 60° C

6. CLEANING

Surface cleaning with a cloth.
Do not use: acetone, tar remover, trichloroethylene.

Resistance to the following agents: Hexane (EN 60669-1), Methylated spirits, Soapy water, Diluted ammonia, Diluted pure bleached 10%, Glass cleaning substance, Pre-impregnated wipes.

Caution: A preliminary test should be carried out if other specific cleaning products are to be used.

7. ACCESSORIES

Lamp
Become illuminated with lamp Cat. No 7 824 57

128, av. du Maréchal-de-Lattre-de-Tassigny - 87045 LIMOGES Cedex
Tel : 0 (+33) 5 55 06 87 87 Fax : 0 (+33) 5 55 06 88 88
www.legrand.com

Forix™ - IP 2X Push-buttons

Cat. No(s).: 7 824 05/35



1. USE

General lighting control mechanisms become illuminated with lamp (Cat. No. 7 824 57).

2. RANGE

Finishes		Designation
White	Ivory	
7 824 05	7 824 35	One gang push-button

3. OVERALL DIMENSIONS

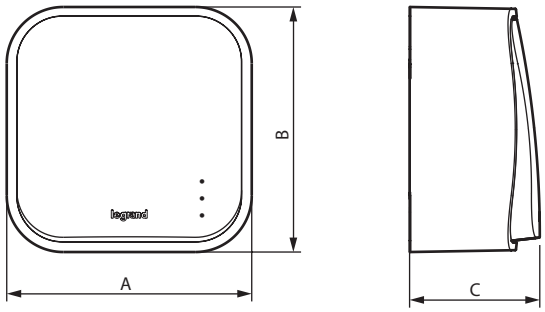

Cat. No.	A	B	C
7 824 05/35	65	65	34.5

Base:

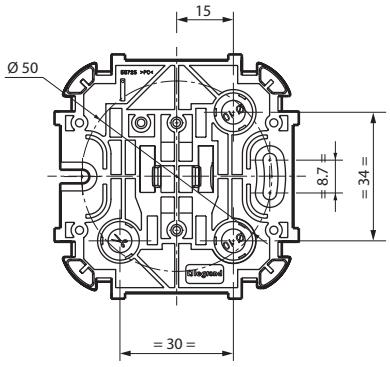

4. CONNECTION

Information for pre-cut:

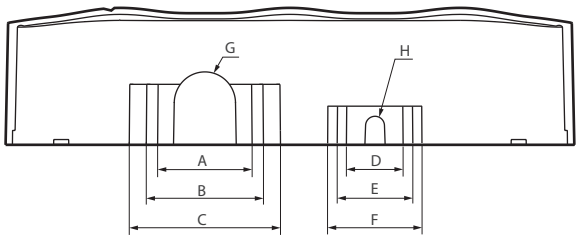

Cat. No.	Pre-cut sides (mm)			
	A 25 x16	B 31 x 16	C 40 x 16	D 15 x 10
7 824 05/35	-	-	-	2
	E 20 x 10	F 25 x 10	G Ø 16	H Ø 5
	2	2	2	2

Stripping: 10 mm
Terminal type: with screws
Terminal capacity up to: 2 x 2.5 mm²
Recommended screwdriver size: pozidrive No 2
Recommended tightening torque: 0.5 Nm

5. TECHNICAL CHARACTERISTICS

■ 5.1 Mechanical characteristics
Protection against liquids: IP 21
Impact tests: IK 04

■ 5.2 Material characteristics
Base: PC
Cover: PP
Rocker: ABS
Mechanism: PC

■ 5.3 Electrical characteristics
Voltage: 250 VAC
Current: 6 A

■ 5.4 Climatic characteristics
Storage and use temperature: - 25° C to + 60° C

6. CLEANING

Surface cleaning with a cloth.
Do not use: acetone, tar remover, trichloroethylene.

Resistance to the following agents: Hexane (EN 60669-1), Methylated spirits, Soapy water, Diluted ammonia, Diluted pure bleached 10%, Glass cleaning substance, Pre-impregnated wipes.

Caution: A preliminary test should be carried out if other specific cleaning products are to be used.

7. ACCESSORIES

Lamp
Become illuminated with lamp Cat. No 7 824 57