

SylFlat LED Non Dimmable - Recessed

SYLFLAT 1400 ROUND 4000K

0053295



Product features

- Integrated round recessed 220mm diameter LED downlight providing uniform distribution with an opal diffuser, 110° beam angle, 1400LM, 15W, 93lm/W, 4000K, CRI80, non-dimmable, IP20, IK03, 30,000hrs (L70)



PRODUCT OVERVIEW

IPC Code	0053295
Product name	SYLFLAT 1400 ROUND 4000K
Technology	LED
Housing	Plastic
Mount	Ceiling recessed
Fixture rating	Enclosed
Environment	Internal
General application	Residential & Consumer
Certifications	EUNEW008
ETIM Class	EC001744
E-number FI	4274333
E-number SE	7470744
Fixture luminous flux (lm)	1400
Luminaire efficacy (lm/W)	93
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Colour Consistency (SDCM)	5
Beam Angle (°)	110
Glare control	UGR 28
Photobiological Risk Group	RG0
Total power consumption (W)	15
Electrical protection	Class II
Control gear type	Electronic
Control gear mounting	Integrated
Dimmable	No
Average life (Nominal) (h)	30000
Housing colour	White
IP rating	IP20
IK rating	IK03
Product EAN number	5410288532950

SylFlat LED Non Dimmable - Recessed

SYLFLAT 1400 ROUND 4000K
0053295

Lamps	No
Included lamp	INTEGRATED LED

DATA TABLE

General data

IPC Code	0053295
Product name	SYLFLAT 1400 ROUND 4000K
Technology	LED
Housing	Plastic
Mount	Ceiling recessed
Fixture rating	Enclosed
Environment	Internal
General application	Residential & Consumer
Operating temperature range (°C)	(-10) - 40°C
Certifications	EUNEW008
ETIM Class	EC001744
E-number FI	4274333
E-number SE	7470744

Optical data

Fixture luminous flux (lm)	1400
Luminaire efficacy (lm/W)	93
LOR (%)	100
Colour temperature (K)	4000
Light colour	Neutral White
CRI (Ra)	80
Colour Variation Initial (SDCM)	6
Colour Consistency (SDCM)	5
Adjustable chromaticity	N
Beam Angle (°)	110
Distribution type	Direct
Glare control	UGR 28
Photobiological Risk Group	RG0

Electrical data

Total power consumption (W)	15
Mains voltage (V)	220-240V~
Lamp power factor	0.9
Electrical protection	Class II
Control gear type	Electronic
Control gear mounting	Integrated
Dimmable	No
Drive current (mA)	150
Inrush Current (A)	4.2
Inrush Duration (µs)	53
Glow Wire Test (°C)	650
Nominal Frequency (Hz)	50/60Hz
Max. Luminaires per 10A C Breaker	12

SylFlat LED Non Dimmable - Recessed

SYLFLAT 1400 ROUND 4000K

0053295

Max. Luminaires per 16A C Breaker 19

Lifetime data

Lumen maintenance - L70 B50	30000
Average life (Nominal) (h)	30000


Physical data

Housing colour	White
IP rating	IP20
IK rating	IK03
Diffuser finish	Opal
Diffuser material	Polycarbonate
Nominal Product Length (mm)	220
Nominal Product Width (mm)	220
Nominal Product Height (mm)	27
Nominal Product Diameter (mm)	220
Max. Lamp Diameter (mm) - D	220
Weight (kg)	0.3
Recessed Depth (mm)	27

Packaging

Single packaging type	Carton
Product EAN number	5410288532950
Packaging single length / height (cm)	27.5
Packaging single width (cm)	6.6
Packaging single depth (cm)	23.5
DUN14 (outer)	15410288532957
Units per outer package	6
Packaging outer length / height (cm)	43.0
Packaging outer width (cm)	29.0
Packaging outer depth (cm)	25.5

PHOTOMETRY


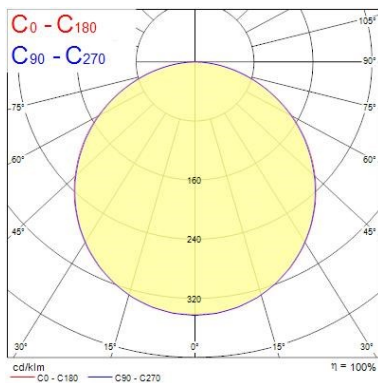


Distance [m]	Cone diameter [m]	Beam angle [°]	Illuminance [lx]
0.5	1.52 1.55	55.8° 57.1°	2008 198
1.0	3.03 3.09	55.8° 57.1°	501 42
1.5	4.55 4.64	55.8° 57.1°	223 19
2.0	6.07 6.18	55.8° 57.1°	135 11
2.5	7.59 7.73	55.8° 57.1°	80 7
3.0	9.10 9.27	55.8° 57.1°	56 5

Distance [m] Cone diameter [m]
C0 - C180 (Half beam angle: 114.2°)
C90 - C270 (Half beam angle: 113.2°)

SylFlat LED Non Dimmable - Recessed *SYLFLAT 1400 ROUND 4000K* 0053295

TECHNICAL DRAWINGS

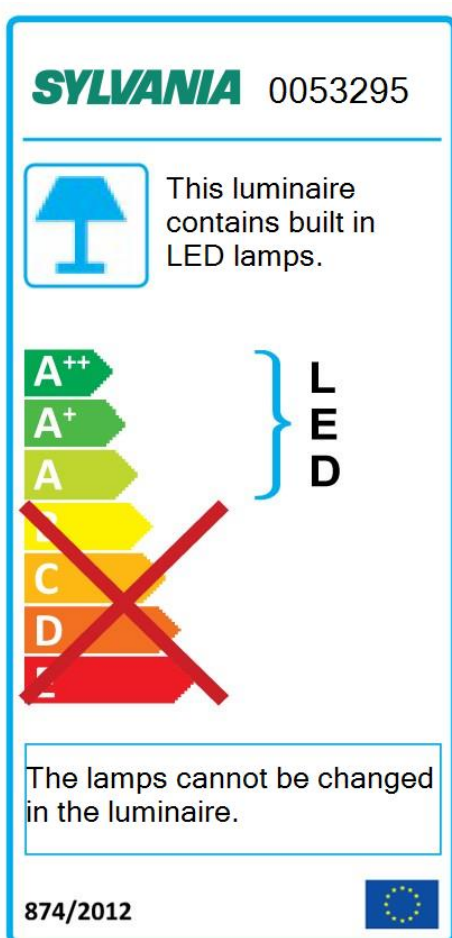

SylFlat LED Non Dimmable - Recessed *SYLFLAT 1400 ROUND 4000K* 0053295

