
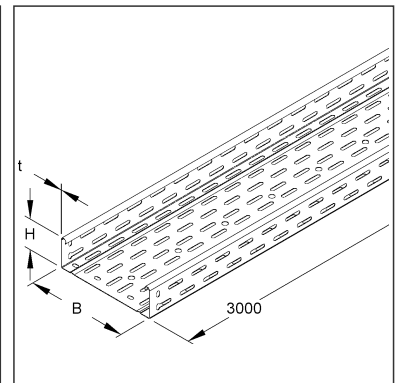
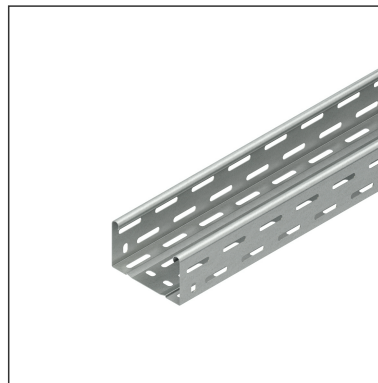


Cable Tray

perforated

RLC 60.150

EAN Code: 4013339870240

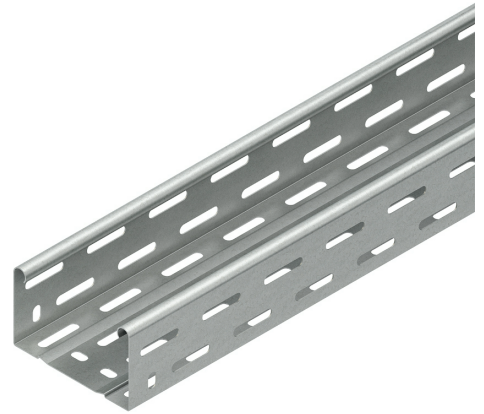

Article Description

Cable tray, 60x150x3000 mm, perforated, continuous beads, steel, pre-galvanised according to DIN EN 10346, with connector

Incl. accessories

3 meter = 1 piece		✓ lowest delivery unit	– preferred delivery unit
Model No.	Description	quantity	
RVC 60	Splice plate, screwless, height 60 mm, steel, pre-galvanised according to DIN EN 10346	2 pc.	
6 meter = 1 bundle		– lowest delivery unit	✓ preferred delivery unit
Model No.	Description	quantity	
RVC 60	Splice plate, screwless, height 60 mm, steel, pre-galvanised according to DIN EN 10346	4 pc.	
450 meter = 1 rack		– lowest delivery unit	– preferred delivery unit
Model No.	Description	quantity	
RVC 60	Splice plate, screwless, height 60 mm, steel, pre-galvanised according to DIN EN 10346	300 pc.	

Technical Datasheet

Cable Tray System

RLC 60.150

Additional Price Information

Article group	N13
---------------	-----

Weight


Weight per quantity unit	1,924 kg
Weight in kg per 100	192 kg

Physical Article Dimensions

Height	60.00 mm
Width	150.00 mm
Depth/length	3000 mm

Load Specifications

Load diagram: q = evenly distributed cable load (tested acc. to DIN EN IEC 61537)

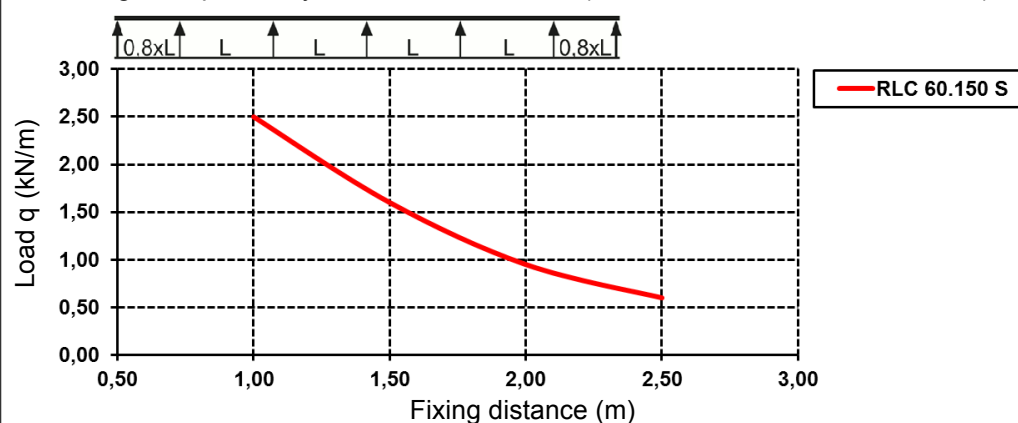

Packing Dimension

3 meters = 1 piece		✓ VP1-smallest packaging unit (PU)			
Lenght	3000 mm	Width	150.00 mm	Height	60.00 mm
Gross weight	5,77 kg	Volume	0,027 m³		
Min. quantity	3	Max. Quantity	3		

6 meters = 1 bundle		✓ VP2-preferred PU			
Lenght	3000 mm	Width	155.00 mm	Height	65.00 mm
Gross weight	12 kg	Volume	0,030 m³		
Min. Quantity	6.00	Max. Quantity	6.00		

450 meters = 1 rack					
Lenght	3000 mm	Width	1162 mm	Height	1120 mm
Gross weight	964 kg	Volume	3,904 m³		
Min. Quantity	450.00	Max. Quantity	450.00		

Tender Text

Cable tray, acc. to DIN EN 61537, with offset bottom and side perforations for

Technical Datasheet

Cable Tray System

RLC 60.150

Tender Text

continuous fastening and attachment of the system components and with continuous central perforation for suspension with threaded rods M 10/..., continuous beads in the bottom ensure a quick positive longitudinal connection by locking the screwless splice plates RVC 60 with the side beams, including two screwless splice plates RVC 60.

Dimensions (approx. dimensions) H x W : 60 x 150 mm

Material thickness : 0.9 mm

Centre hole : Ø 11 mm

Delivery length : 3000 mm

Usable cross section : 8800 mm²

Material : Steel, pre-galvanised acc. to DIN EN 10346

NIEDAX Model No. : RLC 60.150

EP Material _____ EP Wage _____

Unit price/meter

Safety & Environment

REACH Date	19.01.2021
REACH Info	Conformable
RoHS Info	Conformable

Origin & International Trade

Country of origin	DE
Customs tariff number	73089059

Related items

Cover

Model No.	Description
RD 150	Cover for cable tray/-ladder, with joint strip, 152x3000 mm, steel, pre-galvanised according to DIN EN 10346
RDHF 9 E2	Cover clamp, stainless steel, material code: 1.4310
RDHK 60 E2	Cover retaining clamp, height 58 mm, stainless steel, material code: 1.4310
RDRS 9	Turning bolt with locking nut acc. to DIN EN ISO 10511, steel, pre-galvanised according to DIN EN 10346, incl. accessories
RDV 150	Cover for cable tray/-ladder, with joint strip, 152x3000 mm, steel, pre-galvanised according to DIN EN 10346

Barrier strip

Model No.	Description
RW 50	Barrier strip, 47x3000 mm, t=0,75 mm, steel, pre-galvanised according to DIN EN 10346, incl. accessories
RW 60	Barrier strip, 55x3000 mm, t=0,75 mm, steel, pre-galvanised according to DIN EN 10346, incl. accessories