


Końcówka śrubowa SKS

do 36 kV

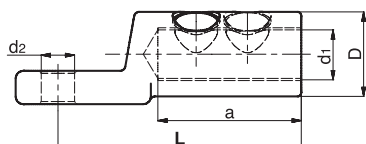

Materiał:

korpusy końcówek aluminiowe cynowane
śruby końcówek standardowo mosiężne cynowane
lub ze specjalnego stopu aluminium

Oznaczenie	Przekrój żyły Al [mm ²]					Cu [mm ²]			d ₁ [mm]	D [mm]	L [mm]	a [mm]	Liczba śrub
	rmv	rm	re	sm	se	rmv	rm	sm					
SKS 12-1695	16-95	16-95	16-95	25-70	16-95	16-95	16-95	25-70	13	24	60	32	1
SKS 16-1695													
SKS 12-50150	50-150	50-120	50-150	50-120	50-150	50-150	50-120	50-120	15,5	30	79	35	1
SKS 16-50150													
SKS 12-95240	95-240	95-185	95-240	95-185	95-240	95-240	95-185	95-185	20	33	95	56	2
SKS 16-95240													
SKS 12-120300	120-300	120-300	120-300	120-240	120-300	120-300	120-300	120-240	25	38	100	67	2
SKS 16-120300													
SKS 12-185400	185-400	185-400	185-400	185-300	–	185-400	185-400	185-300	26	42	120	82	3
SKS 16-185400													
SKS 12-300500	300-500	300-500	300-500	300-400	–	300-500	300-500	300-400	34	52	130	94	3
SKS 16-300500													
SKS 20-300500	400-630	400-630	400-630	400-500	–	400-630	400-630	400-500	34	52	130	94	3
SKS 12-400630													
SKS 16-400630	400-630	400-630	400-630	400-500	–	400-630	400-630	400-500	34	52	130	94	3
SKS 20-400630													

Na zamówienie możemy wykonać końcówki o innych parametrach:
śruby aluminiowe niecynowane przy zamówieniu oznaczać, np: SKS 12-1695-A
śruby aluminiowe cynowane przy zamówieniu oznaczać, np: SKS 12-1695-AT