

Goobay

Antenna-Adapter: Coaxial female - MCX female

for the connection of an antenna cable (coaxial plug) to MCX antenna input
e.g. a DVB-T USB stick



67227 Bulk



Goobay

DC-power inserter incl. power supply for DVB-T antenna

For connection of active DVB-T Antenna



- DC power inserter for active DVB-T antennas incl. power supply!
- output voltage 6V DC

67245 Bulk



Goobay

LTE/4G Blocking Filter, F female - F female

for interference-free DVB-T/
DVB-T2 HD reception

- frequency range: 5 - 790 MHz
- lock range: 790 - 2050 MHz
- continuity range: 5 - 790 MHz
- blocking depth: -50 dB
- extra small insertion loss:
- DC Pass
- RF tight cast housing

67510 Bulk



Goobay

LTE/4G Blocking Filter, F male - F female

for interference-free DVB-T/
DVB-T2 HD reception

- frequency range: 5 - 790 MHz
- lock range: 790 - 2050 MHz
- continuity range: 5 - 790 MHz
- blocking depth: -50 dB - 60 dB
- extra small Extra small insertion loss:
- DC Pass
- RF tight cast housing Class A

67511 Bulk



Goobay


LTE/4G Blocking Filter, Coaxial male - Coaxial female

for interference-free DVB-T/
DVB-T2 HD reception

- frequency range: 5 - 790 MHz
- lock range: 790 - 2050 MHz
- continuity range: 5 - 790 MHz
- blocking depth: -50 dB
- extra small insertion loss:
- DC Pass
- RF tight cast housing

67512 Bulk



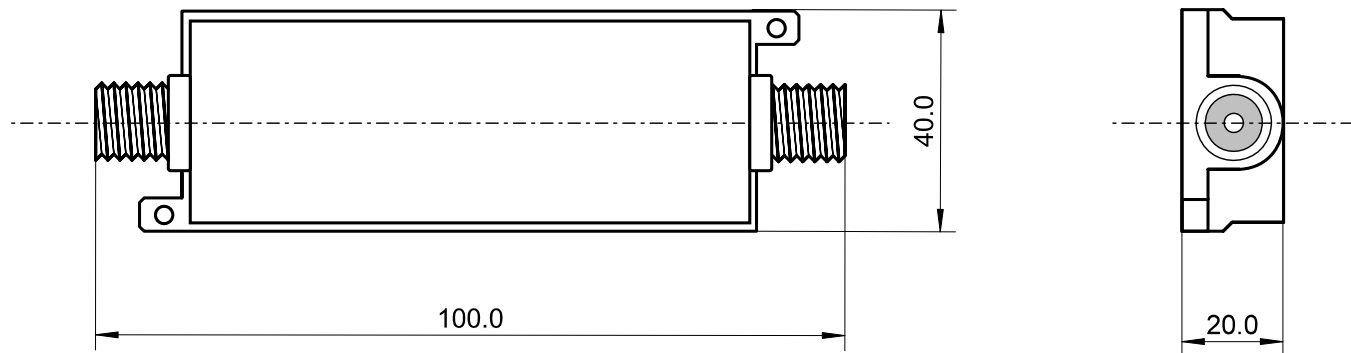

- LTE SPERRFILTER
- Sperrfilter für DVB-T
- Eingang: F-Kupplung
- Ausgang: F-Kupplung
- Frequenzbereich: 5 - 790 MHz
- Sperrbereich: 790 - 2050MHz
- Durchgangsbereich: 5 - 780MHz
- Sperrtiefe: -50dB
- Einfügdämpfung: <1dB
- Gehäuse: Guss - (HF-dicht)
- DC Durchschleifung: ja
- Gewicht: 59 g
- RoHS-konform

- LTE BLOCKING FILTER
- Blocking filter for DVB-T
- Input: F jack
- Output: F jack
- Frequency range: 5 - 790 MHz
- Lock range: 790 - 2050MHz
- Continuity range: 5 - 790MHz
- Spear Depth:-50dB
- Insertion loss: <1dB
- Housing: cast - (RF tight)
- DC pass: yes
- Weight: 59 g
- RoHS compliant

Änderungen

Änderungen		Datum	Name	Bezeichnung	Blatt
Datum	Name	gez.: 07.02.2013	tf	LTE(4G)-Filter F-jack/F-jack, outdoor	
		gepr.: 07.02.2013	tf		
		Norm:		Zeichnungs-Nr.:	von
				67510	

