


Wtyczki przenośne

Shark Wtyczka przenośna IP44

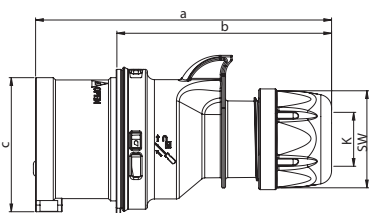


Bieguny	16 Amp			32 Amp		
	3	4	5	3	4	5
a	122	128	134	150	150	155
b	86	92	98	104	104	109
c	47	53	61	63	63	70
K przewodu Ø [mm]	6-15	6-15	8-16	11,5-20	11,5-20	11,5-22
Typy połączeń:				Zaciski śrubowe		
Przewód giętki [mm ²]	1-2,5			2,5-6		
Siła docisku [Ncm]	100 Ncm			110 Ncm		
SW	42	42	42	50	50	50
Waga [g]	109	128	151	181	201	232

- zaciski śrubowe
- tworzywo sztuczne: PA6
- styki: mosiężne
 - aby zamówić styki pokryte niklem należy dodać „v” np. 015-6v

IP44 bryzgoszczelna

Turbo Shark Wtyczka przenośna IP44

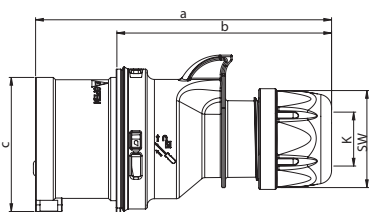


Bieguny	16 Amp			32 Amp		
	3	4	5	3	4	5
a	122	128	134	150	150	155
b	86	92	98	104	104	109
c	47	53	61	63	63	70
K przewodu Ø [mm]	6-15	6-15	8-16	11,5-20	11,5-20	11,5-22
Typy połączeń:				Zaciski bezśrubowe		
Przewód giętki [mm ²]	1-2,5			2,5-6		
SW	42	42	42	50	50	50
Waga [g]	111	132	156	186	206	241

- bezśrubowa technologia podłączenia
- tworzywo sztuczne: PA6
- styki: mosiężne
 - aby zamówić styki pokryte niklem należy dodać „v” np. 015-6Tv

IP44 bryzgoszczelna

Shark Wtyczka przenośna IP67

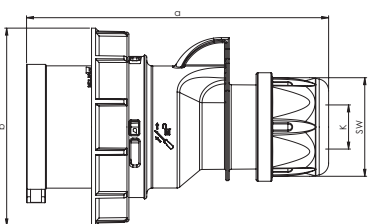


Bieguny	16 Amp			32 Amp		
	3	4	5	3	4	5
a	122	128	134	150	150	155
b	71	79	87	93	93	100
K przewodu Ø [mm]	6-15	6-15	8-16	11,5-20	11,5-20	11,5-22
Typy połączeń:				Zaciski śrubowe		
Przewód giętki [mm ²]	1-2,5			2,5-6		
Siła docisku [Ncm]	100 Ncm			110 Ncm		
SW	42	42	42	50	50	50
Waga [g]	130	154	183	223	242	276

- zaciski śrubowe
- tworzywo sztuczne: PA6
- styki: mosiężne
 - aby zamówić styki pokryte niklem należy dodać „v” np. 0152-6v

IP66/67 wodoszczelna

Turbo Shark Wtyczka przenośna IP67

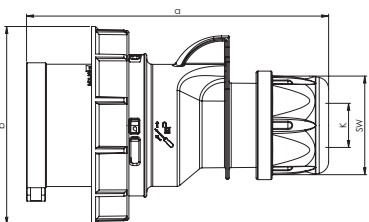

Bieguny	16 Amp			32 Amp		
	3	4	5	3	4	5
a	122	128	134	150	150	155
b	71	79	87	93	93	100
K przewodu Ø [mm]	6-15	6-15	8-16	11,5-20	11,5-20	11,5-22
Typy połączeń:				Zaciski bezśrubowe		
Przewód giętki [mm ²]	1-2,5			2,5-6		
SW	42	42	42	50	50	50
Waga [g]	132	157	188	227	246	285

- bezśrubowa technologia podłączenia
- tworzywo sztuczne: PA6
- styki: mosiężne
 - aby zamówić styki pokryte niklem należy dodać „v” np. 0152-6Tv

IP66/67 wodoszczelna

Amp.	Bieguny	pakowane po/ szt.	110V~	230V~	400V~	500V~	>50- 500V~	>50- 500V~
			Nr kat.	Nr kat.	Nr kat.	Nr kat.	Nr kat.	Nr kat.
			50/60Hz 4h	50/60Hz 3p=6h 4p+5p=9h	50/60Hz 3p=9h 4p+5p=6h	50/60Hz 7h	100-300Hz 10h	301-500Hz 2h
16	3	10	013-4	013-6	013-9	013-7	013-10	013-2
16	4	10	014-4	014-9	014-6	014-7	014-10	014-2
16	5	10	015-4	015-9	015-6	015-7	015-10	015-2
32	3	10	023-4	023-6	023-9	023-7	023-10	023-2
32	4	10	024-4	024-9	024-6	024-7	024-10	024-2
32	5	10	025-4	025-9	025-6	025-7	025-10	025-2



015-6

16	3	10	013-4TT	013-6TT	013-9TT			
16	4	10	014-4TT	014-9TT	014-6TT			
16	5	10	015-4TT	015-9TT	015-6TT			
32	3	10	023-4TT	023-6TT	023-9TT			
32	4	10	024-4TT	024-9TT	024-6TT			
32	5	10	025-4TT	025-9TT	025-6TT			



015-6TT

16	3	10	0132-4	0132-6	0132-9	0132-7	0132-10	0132-2
16	4	10	0142-4	0142-9	0142-6	0142-7	0142-10	0142-2
16	5	10	0152-4	0152-9	0152-6	0152-7	0152-10	0152-2
32	3	10	0232-4	0232-6	0232-9	0232-7	0232-10	0232-2
32	4	10	0242-4	0242-9	0242-6	0242-7	0242-10	0242-2
32	5	10	0252-4	0252-9	0252-6	0252-7	0252-10	0252-2



0152-6

16	3	10	0132-4TT	0132-6TT	0132-9TT			
16	4	10	0142-4TT	0142-9TT	0142-6TT			
16	5	10	0152-4TT	0152-9TT	0152-6TT			
32	3	10	0232-4TT	0232-6TT	0232-9TT			
32	4	10	0242-4TT	0242-9TT	0242-6TT			
32	5	10	0252-4TT	0252-9TT	0252-6TT			



0252-6TT

