




Tetrix

With the introduction of the Tetrix light-line, the emphasis is on simplicity. Easy ordering, with everything assembled in one box, and tool-less installation are guaranteed to reduce installation work to a minimum. Tetrix comes in 1.5 or 3 m lengths with a pre-mounted mechanical coupling and through-wiring connector, reflector, suspension bracket and snap-on finishing pieces. A starter kit is required to start the light line. The pre-assembled trunking is equipped with 5 x 2.5 mm² through-wiring. Tetrix is delivered with a white in-laid reflector to cover most standard applications. Conventional and HF versions are available in 58 W. The white pre-lacquered profile forms the carrier of the system. Its shape has been designed to be compact and rigid. Dedicated 1.5 m trunkings can be equipped with emergency lighting. Maintenance is carried out from below, enabling the system to be used as a surface mounted solution.



Dimensions in mm

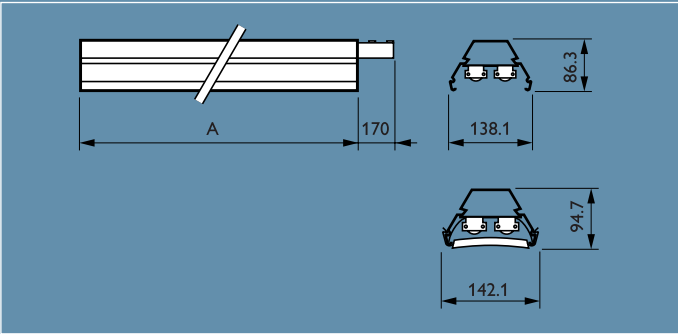

Product ID	A
TTX150 581	1530
TTX150 582	3060



TTX150

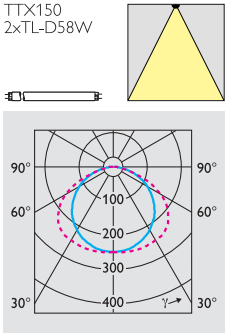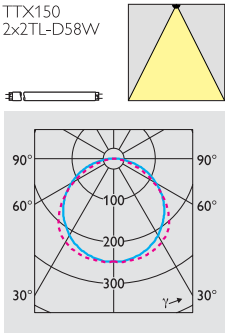

TTX150 + GTX150 L

Preferred selection

Product ID	European Order Code (EOC)
TTX150 581 5X2,5	12479700
TTX150 581 1XTL-D58W IC	12483400
TTX150 581 1XTL-D58W EI	12517600
TTX150 581 1XTL-D58W HFB	12502200
TTX150 581 1XTL-D58W IC EL3	12525100
TTX150 581 1XTL-D58W EI EL3	12526800
TTX150 581 2XTL-D58W IC	12507700
TTX150 581 2XTL-D58W EI	12518300
TTX150 581 2XTL-D58W HFB	12508400
TTX150 581 2XTL-D58W IC EL3	12531200
TTX150 581 2XTL-D58W EI EL3	12532900

Preferred selection

Product ID	European Order Code (EOC)
TTX150 582 5X2,5	12514500
TTX150 582 2X1XTL-D58W IC	12486500
TTX150 582 2X1XTL-D58W EI	12519000
TTX150 582 2X1XTL-D58W HFB	12487200
TTX150 582 2X2XTL-D58W IC	12496400
TTX150 582 2X2XTL-D58W EI	12521300
TTX150 582 2X2XTL-D58W HFB	12497100
TTX150 582 2X2XTL-D58W IC 3CL	12494000
TTX150 582 2X2XTL-D58W EI 3CL	12520600
TTX150 582 2X2XTL-D58W HFB 3CL	12495700
ZTX150 MB-EC-2XEP	12444599
ZTX150 CPX	12454400
GTX150 L	12477399



Mechanical connection of the trunking sections by pushing them together.



Secure mechanical connection with simple finger-operated locking lever.



Pre-assembled Tetrix delivered with all components in one box.



Starter kit.